
MARION COUNTY SURVEYOR'S OFFICE

DEBRA S. JENKINS MARION COUNTY SURVEYOR SECTION CORNER RECORD SEC. $30\,\mathrm{TWN}$. 15_{N} RNG. 5_{E}

BRYAN F. CATLIN, PLS TECHNICAL SUPERVISOR

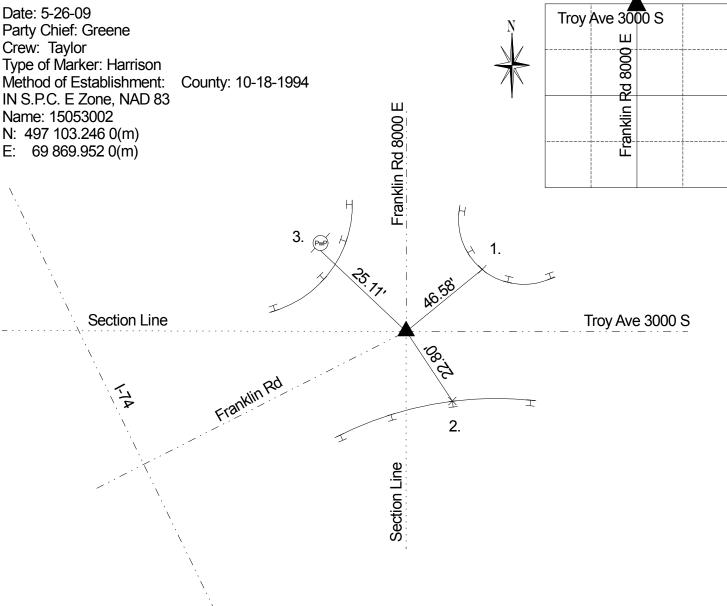

Original post set 1820 by John Hendricks with witnesses: 30" white oak S 45 E 38 links, 12" ash N 64 W 9 links per Marion County Atlas p. 14. Survey by Fatout 4-18-1850 indicates no stone but witnesses: 28" oak S 87 1/2 W 20 links, 36" white oak S 35 1/2 E 71 links per Franklin Township Legal Survey Book p. 9. A stone was set 8-26-1941 that replaced an old stake per Frank Unversaw. Cathcart 4-9-1953 called a stone. Baden 12-18-58 called a RR spike over a stone. Monroe 11-21-60 called a road nail w / washer. Fortner 2-14-75 called a road nail w / washer. Fortner 3-4-75 called a PK nail. Hiselman 12-5-75 called a PK nail. Gries 11-10-87 called a PK nail. Kiste 10-18-94 called a PK nail. Excavated 1996 by MCSO and Harrison set. Retied 9-12-1999 by Whiteside. Retied 2-25-2004 by Wilcoxen. Retied 5-26-09 by Greene.

REF.	DISTANCE	DESCRIPTION
1.	46.58'	Cut 'x' in guard rail bolt
2.	22.80'	Cut 'x' in guard rail bolt
3.	25.11'	Mag nail w/brass washer S PwP #24-650 A 8" up (set)